



PROVEN. POWERFUL. PROPULSE NOW!

2019

Instant Access!
ProPulse Now! Product Catalog



ProPulse innovates, engineers and manufactures custom hose solutions for high-pressure fluid conveyance.

(563) 583-4758 | www.powermovingforward.com



NOW!

With ProPulse Now! you can enjoy the convenience of:

+ Shipment within 24 hours on in-stock inventory.

Welcome to **PROPULSE NOW!**


ProPulse stocks over 150 of the most widely used hose assemblies for four vertical markets: pressure washing, car washing, carpet cleaning as well as sewer jetting and drain cleaning. As an added effort to provide value and service to customers, ProPulse has structured pricing based on annual revenue and quantity commitments to ProPulse.

+ Industry standard products for high-pressure cleaning applications.

+ Access to industry exclusive products patented and patent pending.

+ Access to tier discounts based on annual sales and volume purchases.

+ Customized products available based on annual sales and minimum order quantity 10 assemblies.

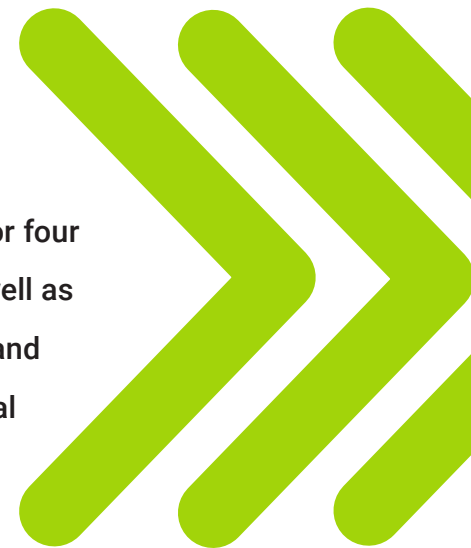

CONTENTS

ProPulse Now! Catalog TABLE OF CONTENTS



6
Pressure Washer Hose
CONSUMER CLEAN
1/4" 3000PSI (140°F) (TEXTILE BRAID)



7
Pressure Washer Hose
CONSUMER UBERFLEX™
1/4" 3100PSI (140°F) (TEXTILE BRAID)



9
Pressure Washer Hose (cold-water)
COMMERCIAL CLEAN
3/8" 4000PSI (250°F) (1-WIRE BRAID)



10
Pressure Washer Hose (cold-water)
COMMERCIAL CLEANSTREAM™
3/8" & 5/16" 4000PSI (140°F) (1-WIRE BRAID)



11
Pressure Washer Hose (cold-water)
COMMERCIAL UBERFLEX®
3/8" 4000PSI (140°) (TEXTILE BRAID)



12
Pressure Washer Hose (hot-water)
ARM-A-FLEX™
3/8" 4785PSI (250°) (2-WIRE BRAID)



13
Pressure Washer Hose (hot-water)
COMMERCIAL HOT CLEAN
3/8" 6000PSI (250°) (2-WIRE BRAID)



14
Car/Bay Wash Hose
RUBBER DROP HOSE
1/4" & 3/8" 3000-4000PSI
(250°) (1-WIRE BRAID)



15
Car/Bay Wash Hose
CLEANSTREAM™ DROP HOSE
3/8" 4000PSI (140°) (1-WIRE BRAID)



16
Car/Bay Wash Hose
UBERFLEX® DROP HOSE
3/8" 4000PSI (140°) (TEXTILE BRAID)



17
Carpet Solution Hose
CARPET CLEAN
1/4" 3000PSI (250°) (1-WIRE BRAID)



18
Sewer & Jetter Hose
JETTER LATERAL LINE
1/8"-3/8" 4000-4800PSI (160°) (TEXTILE BRAID)



19
Sewer & Jetter Hose
JETTER MAIN LINE
1/2" 4400PSI (160°) (TEXTILE BRAID)



21
Sewer & Jetter Hose
BULK HOSE



22
Sewer & Jetter Hose
QUICK CONNECTS

PRESSURE WASHER HOSE

PRESSURE WASHER HOSE CONSUMER CLEAN (COLD-WATER)

These entry level cleaning hoses are best suited for gas and electric cold-water pressure washers up to 2.5 GPM. Available in lengths of 25', 30' and 50', these hose assemblies are best suited for residential and light duty cleaning environments.

NOT FOR HOT WATER OR STEAM

- › Connectors: M22xM22 or M22xFBSPSVL
- › Reinforcement: One-Layer Textile Braid
- › Cover: Smooth Thermoplastic
- › Inner Diameter: 1/4"
- › Working (Max): 3000 PSI
- › Burst (Min) 3:1 Working Pressure
- › Impulse Life: 100,000+
- › Maximum Temperature: 140°F
- › Volume Discounts: Quantities of 20, 30, 40, 50, 100, 200 or 300

Consumer Clean | 1/4" 3100PSI (140°F) (Textile Braid)

Item Code	Description
646200081	PW PLS OPP BLACK 1/4"x25' 3100PSI M22xM22 2BR LONG NUTS
646200085	PW PLS OPP BLACK 1/4"x30' 3100PSI M22xM22 2BR LONG NUTS
646200098	PW PLS OPP BLACK 1/4"x50' 3100PSI M22xM22 2BR LONG NUTS
646200092	PW PLS OPP BLACK 1/4"x25' 3100PSI M22xFBSPP 2BR LONG NUTS

+ NON-MARKING



BLACK



PRESSURE WASHER HOSE CONSUMER UBERFLEX* (COLD-WATER)

ProPulse has upgraded the standard cold-water pressure washer hose to an innovative, lightweight, flexible, UV-resistant, and ozone-resistant consumer cleaning hose. The UberFlex is easy to use, stable in length and truly non-marking.

**only available for bronze discount level and above*

NOT FOR HOT WATER OR STEAM

- › Connectors: M22xM22
- › Reinforcement: One-Layer Textile Braid
- › Cover: Matte Textured Thermoplastic
- › Inner Diameter: 1/4"
- › Working (Max): 3100 PSI
- › Burst (Min) 3:1 Working Pressure
- › Impulse Life: 100,000+
- › Maximum Temperature: 140°F
- › Volume Discounts: Quantities of 25, 50, 100, 200, 300 or 600


Consumer UberFlex™ | 1/4" 3100PSI (140°F) (Textile Braid)

Item Code	Description
646200261	UBERFLEX HS 1/4"x25' 3100 PSI MATTE BLACK M22xM22
646200594	UBERFLEX HS 1/4"x50' 3100 PSI MATTE BLACK M22xM22
646200267	UBERFLEX HS 1/4"x25' 3100 PSI MATTE BLUE M22xM22
646200274	UBERFLEX HS 1/4"x50' 3100 PSI MATTE BLUE M22xM22

+ NON-MARKING



MATTE BLACK



MATTE BLUE



PRESSURE WASHER HOSE



PRESSURE WASHER HOSE COMMERCIAL CLEAN

An economical choice for pressure washer hose. Designed for flow ratings of 2.5 to 5 GPM commercial cleaning applications. Rubber construction throughout, with a single layer of steel wire braid, the hose of choice for manufacturers of commercial duty pressure washers and used by many OEMs in combination with high-flow and horsepower. **NOT FOR STEAM**

- › Connectors: SOLxSWV & M22xM22 3/8" With or Without Quick Connects
- › Reinforcement: One-Layer Wire Braid
- › Cover: Smooth or Wrapped Rubber
- › Inner Diameter: 3/8" & 5/16"
- › Working (Max): 4000 PSI
- › Burst (Min) 3:1 Working Pressure
- › Impulse Life: 200,000+
- › Temperature (Max): 250°F
- › Volume Discounts: Quantities of 20, 30, 40, 50, 100, 200 and 300

Commercial Rubber | 5/16" 4000 PSI (250°F) (1-Wire Braid)

Item Code	Description
989400072	RBR HS 1WIRE BLACK 5/16"x50' 3117PSI M22xM22



Commercial Rubber | 3/8" 4000PSI (250°F) (1-Wire Braid)

Item Code	Description
535100002	RBR HS SM BLACK 3/8"x50' 4000PSI SOLxSWV 2BR
535100005	RBR HS SM BLACK 3/8"x100' 4000PSI SOLxSWV 2BR
535100070	RBR HS SM BLUE 3/8"x25' 4000PSI SOLxSWV 2BR
535100057	PW RBR SM 1WIRE BLUE 3/8"x50' 4000PSI SOLxSWV 2BR
535100058	PW RBR SM 1WIRE BLUE 3/8"x100' 4000PSI SOLxSWV 2BR
989400007	RBR HS GREY 3/8"x25' 4000PSI SOLxSWV 2BR
989400008	RBR HS GREY 3/8"x50' 4000PSI SOLxSWV 2BR
989400042	RBR HS GREY 3/8"x75' 4000PSI SOLxSWV 2BR
989400043	RBR HS GREY 3/8"x100' 4000PSI SOLxSWV 2BR
989400003	RBR HS BLACK 3/8"x25' 4000PSI SOLxSWV 2BR
989400004	RBR HS BLACK 3/8"x50' 4000PSI SOLxSWV 2BR
989400031	RBR HS BLACK 3/8"x75' 4000PSI SOLxSWV 2BR
989400022	RBR HS BLACK 3/8"x100' 4000PSI SOLxSWV 2BR
989400109	RBR HS BLUE 3/8"x25' 4000PSI SOLxSWV 2BR
989400052	RBR HS BLUE 3/8"x50' 4000PSI SOLxSWV 2BR
989400081	RBR HS BLUE 3/8"x100' 4000PSI SOLxSWV 2BR
989400099	RBR HS YELLOW 3/8"x50' 4000PSI SOLxSWV 2BR
989400101	RBR HS YELLOW 3/8"x100' 4000PSI SOLxSWV 2BR
989400150	RBR HS GREY 3/8"x50' 4000PSI SOLxSWV w/QCs 2BR
989400993	RBR HS GREY 3/8"x100' 4000PSI SOLxSWV w/QCs 2BR
989400075	RBR HS BLACK 3/8"x50' 4000PSI SOLxSWV w/QCs 2BR
989400019	RBR HS BLACK 3/8"x100' 4000PSI SOLxSWV w/QCs 2BR

Commercial Rubber Jumper | 3/8" 4000PSI (250°F) (1-Wire Braid)

Item Code	Description
9895B5024	RBR HS GREY 3/8"x2' 4000PSI SOLxSWV
9895B5048	RBR HS GREY 3/8"x4' 4000PSI SOLxSWV
9895B5072	RBR HS GREY 3/8"x6' 4000PSI SOLxSWV
9895B5120	RBR HS GREY 3/8"x10' 4000PSI SOLxSWV
9895B3024	RBR HS BLACK 3/8"x2' 4000PSI SOLxSWV
9895B3036	RBR HS BLACK 3/8"x3' 4000PSI SOLxSWV
9895B3048	RBR HS BLACK 3/8"x4' 4000PSI SOLxSWV



PRESSURE WASHER HOSE

PRESSURE WASHER HOSE

COMMERCIAL CLEANSTREAM™ (COLD-WATER)

Traditional rubber hose is heavy, leaves marks and is hard to handle. ProPulse is proud to introduce this revolutionary, new and application specific solution for the most demanding high performance cold water hose. Exclusive to ProPulse, this patented product is ideally suited for cold-water flat surface preparation, commercial car cleaning, agricultural cleaning and a whole lot more! **NOT FOR HOT WATER OR STEAM**

- › Connectors: SOLxSWV
- › Reinforcement: One-Layer Wire Braid
- › Cover: Matte Textured Thermoplastic
- › Inner Diameter: 5/16" or 3/8"
- › Working (Max): 4000 PSI
- › Burst (Min) 3:1 Working Pressure
- › Impulse Life: 200,000+
- › Temperature (Max): 140°F
- › Volume Discounts: Quantities of 20, 30, 40, 50, 100, 200 and 300

COMMERCIAL CLEANSTREAM™ | 5/16" 4000PSI (140°F) (1-Wire Braid)

Item Code	Description
489400026	HYBD HS 5/16"x50' 4000PSI BLUE SOLxSWV 2BR

COMMERCIAL CLEANSTREAM™ | 3/8" 4000PSI (140°F) (1-Wire Braid)

Item Code	Description
489400008	HYBD HS 3/8"x50' 4000PSI GREY SOLxSWV 2BR
489400009	HYBD HS 3/8"x100' 4000PSI GREY SOLxSWV 2BR
489400011	HYBD HS 3/8"x50' 4000PSI BLACK SOLxSWV 2BR
489400013	HYBD HS 3/8"x25' 4000PSI BLUE SOLxSWV 2BR
489400014	HYBD HS 3/8"x50' 4000PSI BLUE SOLxSWV 2BR
489400015	HYBD HS 3/8"x100' 4000PSI BLUE SOLxSWV 2BR



PRESSURE WASHER HOSE

COMMERCIAL UBERFLEX® (COLD-WATER)*

UberFlex possesses the unique properties of superior resistance to permanent kinking and abrasion, and stability in length. The textured cover offers reduced snagging and drag resistance and overall ease of handling. UberFlex hoses are preferred by pressure washer manufacturers on their middle and high end entry level products. ***only available for bronze discount level and above NOT FOR HOT WATER OR STEAM**

- › Connectors: SOLxSWV
- › Reinforcement: One-Layer Textile Braid
- › Cover: Matte Textured Thermoplastic
- › Inner Diameter: 3/8"
- › Working (Max): 4000 PSI
- › Burst (Min) 3:1 Working Pressure
- › Impulse Life: 200,000+
- › Temperature (Max): 140°F
- › Volume Discounts: Quantities of 25, 50, 100, 200 and 300

COMMERCIAL UBERFLEX™ | 3/8" 4000PSI (140°F) (Textile Braid)

Item Code	Description
646200669	PLS HS 3/8"x50' 4000PSI MATTE BLACK SOLxSWV 2BR
646200665	PLS HS 3/8"x50' 4000PSI MATTE BLUE SOLxSWV 2BR
646200670	PLS HS 3/8"x50' 4000PSI MATTE BLACK SOLxSWV 2BR, QC's
646200990	PW PLS UBER BLUE 3/8"x50' 4000PSI, SOLxSWV, 2SM BR, QC's
646200672	PLS HS 3/8"x100' 4000PSI MATTE BLACK SOLxSWV 2BR
646200673	PLS HS 3/8"x100' 4000PSI MATTE BLUE, SOLxSWV 2BR
646200674	PLS HS 3/8"x100' 4000PSI MATTE BLACK, SOLxSWV 2BR QC's
646200991	PW PLS UBER BLUE 3/8"x100' 4000PSI SOLxSWV 2SM BR QC's
646200719	PLS HS 3/8"x200' 4000PSI MATTE BLUE SOLxSWV 2BR

+ NON-MARKING



UBERFLEX™ BY PROPULSE®

PRESSURE WASHER HOSE



PRESSURE WASHER HOSE ARM-A-FLEX™ (HOT-WATER)


It's an undeniable fact: Most rubber pressure washer hoses wear from the outside in, rather than the inside out. And in some applications that can happen way too fast. Wooden decks, asphalt roofs and surfaces and concrete. They can all tear up a hose cover. Introducing ProPulse™ Arm-a-Flex™ with a specially engineered ultra-high molecular weight jacket designed to extend hose cover life by up to ten times.

NOT FOR STEAM

- › Connectors: SOLxSWV
- › Reinforcement: Two-Layer Wire Braid
- › Cover: UHMWPE Ultra-High Molecular Weight Polyethylene
- › Inner Diameter: 3/8"
- › Working (Maximum): 4785 PSI
- › Burst (Min) 4:1 Working Pressure
- › Impulse Life: 200,000+
- › Temperature (Max): 250°F
- › Volume Discounts: Quantities of 20, 30, 40, 50, 100, 200 and 300

COMMERCIAL ARM-A-FLEX | 3/8" 4785PSI (250°) (2-Wire Braid)

Item Code	Description
989400258	ARM-A-FLEX BLACK 3/8"x50' 4785PSI SOLxSWV 2BR
989400272	ARM-A-FLEX BLACK 3/8"x100' 4785PSI SOLxSWV 2BR



PRESSURE WASHER HOSE COMMERCIAL HOT CLEAN (HOT-WATER)

Designed for high flow (up to 8 GPM) heavy duty hot water cleaning application, ProPulse's commercial hot clean has a rubber construction throughout with a double layer of steel wire braid. It is the hose of choice for manufacturers of hot water pressure washers and used by many OEMs at the upper end of the product range.

NOT FOR STEAM

- › Connectors: SOLxSWV
- › Reinforcement: Two-Layer Wire Braid
- › Cover: Wrapped Textured Rubber
- › Inner Diameter: 3/8"
- › Working (Max): 6000 PSI
- › Burst (Min) 3:1 Working Pressure
- › Impulse Life: 200,000+
- › Temperature (Max): 250°F
- › Volume Discounts: Quantities of 20, 30, 40, 50, 100, 200 and 300

COMMERCIAL RUBBER | 3/8" 6000PSI (250°) (2-Wire Braid)

Item Code	Description
989400060	RBR HS GREY 3/8"x50' 6000PSI SOLxSWV 2BR
989400061	RBR HS GREY 3/8"x100' 6000PSI SOLxSWV 2BR
989400027	RBR HS BLACK 3/8"x50' 6000PSI SOLxSWV 2BR
989400146	RBR HS BLACK 3/8"x75' 6000PSI SOLxSWV 2BR
989400026	RBR HS BLACK 3/8"x100' 6000PSI SOLxSWV 2BR

COMMERCIAL RUBBER JUMPER | 3/8" 6000PSI (250°) (2-Wire Braid)

Item Code	Description
9895B9024	RBR HS GREY 3/8"x2' 6000PSI SOLxSWV
9895B9036	RBR HS GREY 3/8"x3' 6000PSI SOLxSWV
9895B9048	RBR HS GREY 3/8"x4' 6000PSI SOLxSWV
9895B9072	RBR HS GREY 3/8"x6' 6000PSI SOLxSWV
9895B8060	RBR HS BLACK 3/8"x5' 6000PSI SOLxSWV
9895B9096	RBR HS BLACK 3/8"x8' 6000PSI SOLxSWV
9895B9120	RBR HS GREY 3/8"x10' 6000PSI SOLxSWV



BAY/CAR WASHING HOSE

CAR/BAY WASH HOSE

RUBBER DROP HOSE

A perfect match for self-service car wash applications, ProPulse stocks standard rubber car wash drop hoses. **NOT FOR STEAM**

- › Connectors: SOLxSOL
- › Reinforcement: One-Layer Wire Braid
- › Cover: Smooth Rubber
- › Inner Diameter: 1/4" and 3/8"
- › Working (Max): 3000 & 4000 PSI
- › Burst (Min) 3:1 Working Pressure
- › Impulse Life: 200,000+
- › Temperature (Max): 250°F
- › Volume Discounts: Quantities of 20, 30, 40, 50, 100, 200 and 300

Rubber Drop Hose | 1/4" 3000PSI (250°) (1-Wire Braid)

Item Code	Description
9895PC144	RBR HS SM BLACK 1/4"x12' 3000PSI 3/8"SOLx3/8"SOL 1 BR
9895PC180	RBR HS SM BLACK 1/4"x15' 3000PSI 3/8"SOLx3/8"SOL 1 BR
9895PC216	RBR HS SM BLACK 1/4"x18' 3000PSI 3/8"SOLx3/8"SOL 1 BR
9895PH144	RBR HS SM BLUE 1/4"x12' 3000PSI 3/8"SOLx3/8"SOL 1 BR
9895PH180	RBR HS SM BLUE 1/4"x15' 3000PSI 3/8"SOLx3/8"SOL 1 BR
9895PH216	RBR HS SM BLUE 1/4"x18' 3000PSI 3/8"SOLx3/8"SOL 1 BR

Rubber Drop Hose | 3/8" 4000PSI (250°) (1-Wire Braid)

Item Code	Description
9895RA144	RBR HS SM BLACK 3/8"x12' 4000PSI SOLxSOL 1BR
9895RA180	RBR HS SM BLACK 3/8"x15' 4000PSI SOLxSOL 1BR
9895RA216	RBR HS SM BLACK 3/8"x18' 4000PSI SOLxSOL 1BR
9895RJ144	RBR HS SM BLUE 3/8"x12' 4000PSI SOLxSOL 1BR
9895RJ180	RBR HS SM BLUE 3/8"x15' 4000PSI SOLxSOL 1BR
9895RJ216	RBR HS SM BLUE 3/8"x18' 4000PSI SOLxSOL 1BR

+ NON-MARKING



CAR/BAY WASH HOSE

CLEANSTREAM™ DROP HOSE

Ideal for self-service carwash applications, Cleanstream™ is the latest patented technology from ProPulse providing a real upgrade from the standard bay wash drop hose. For the optimal car wash experience and performance, it possesses unique properties such as unmatched UV, ozone, chemical and abrasion resistance, superior flexibility, overall ease of handling and is truly non-marking. The proprietary, matte textured cover is five times more abrasion resistant and up to 30% lighter than its equivalent counterpart reducing user fatigue.


NOT FOR HOT WATER OR STEAM

- › Connectors: SOLxSOL
- › Reinforcement: One-Layer Wire Braid
- › Cover: Matte Textured Thermoplastic
- › Inner Diameter: 3/8"
- › Working (Max): 4000 PSI
- › Burst (Min) 3:1 Working Pressure
- › Impulse Life: 200,000+
- › Temperature (Max): 140°F
- › Volume Discounts: Quantities of 20, 30, 40, 50, 100, 200 and 300

Cleanstream Drop Hose | 3/8" 4000PSI (140°) (1-Wire Braid)

Item Code	Description
489400016	HYBD HS 3/8"x12' 4000PSI BLACK SOLxSOL 1 BR
489400017	HYBD HS 3/8"x15' 4000PSI BLACK SOLxSOL 1 BR
489400018	HYBD HS 3/8"x18' 4000PSI BLACK SOLxSOL 1 BR
489400019	HYBD HS 3/8"x12' 4000PSI BLUE SOLxSOL 1 BR
489400020	HYBD HS 3/8"x15' 4000PSI BLUE SOLxSOL 1 BR
489400021	HYBD HS 3/8"x18' 4000PSI BLUE SOLxSOL 1 BR

+ NON-MARKING



Rubber Drop Hose ← → Cleanstream™ Drop Hose

CAR/BAY WASH DROP HOSE

CAR/BAY WASH HOSE UBERFLEX™ DROP HOSE

Ideal for self-service carwash applications, ProPulse UberFlex™ is a patented technology providing an innovative, lightweight and superior upgrade for the standard rubber bay wash drop hose. For the optimal car wash experience and performance, it possesses unique properties such as unmatched UV, ozone, chemical and abrasion resistance, superior flexibility, overall ease of handling and is truly non-marking. The proprietary, matte textured cover is five times more abrasion resistant and up to 30% lighter than its equivalent counterpart reducing user fatigue. **NOT FOR HOT WATER OR STEAM**

- › Connectors: SOLxSOL
- › Reinforcement: One-Layer Textile Braid
- › Cover: Matte Textured Thermoplastic
- › Inner Diameter: 3/8"
- › Working (Max): 4000 PSI
- › Burst (Min) 3:1 Working Pressure
- › Impulse Life: 200,000+
- › Temperature (Max): 140°F
- › Volume Discounts: Quantities of 30, 40, 50, 100, 200 and 300

UBERFLEX DROP HOSE | 3/8" 4000PSI (140°) (Textile Braid)

Item Code	Description
646200616	PLS HS 3/8"x12' 4000PSI MATTE BLUE SOLxSOL 1 BR
646200619	PLS HS 3/8"x12' 4000PSI MATTE BLACK SOLxSOL 1 BR
646200617	PLS HS 3/8"x15' 4000PSI MATTE BLUE SOLxSOL 1 BR
646200620	PLS HS 3/8"x15' 4000PSI MATTE BLACK SOLxSOL 1 BR
646200618	PLS HS 3/8"x18' 4000PSI MATTE BLUE SOLxSOL 1 BR
646200621	PLS HS 3/8"x18' 4000PSI MATTE BLACK SOLxSOL 1 BR

+ NON-MARKING



MATTE BLUE

MATTE BLACK

CARPET SOLUTION HOSE

CAR/BAY WASH HOSE CARPET CLEAN


Carpet cleaners' preferred choice for hot water solution hoses. Smooth blue and less marking cover with a seamless heat and chemical resistant tube ideal for the commercial carpet cleaning professional. **NOT FOR STEAM**

- › Connectors: SOLxSOL
- › Reinforcement: One-Layer Wire Braid
- › Cover: Smooth Less-Marking Rubber
- › Inner Diameter: 1/4"
- › Working (Maximum): 3000 PSI
- › Burst (Min) 3:1 Working Pressure
- › Impulse Life: 200,000+
- › Temperature (Max): 250°F
- › Volume Discounts: Quantities of 30, 40, 50, 100, 200 and 300

CARPET CLEAN™ | 1/4" 3000PSI (250°) (1-Wire Braid)

Item Code	Description
535100059	RBR HS SM BLUE 1/4"x50' 3000PSI SOLxSOL 2BR
535100123	RBR HS SM BLUE 1/4"x75' 3000PSI SOLxSOL 2BR
535100105	RBR HS SM BLUE 1/4"x100' 3000PSI SOLxSOL 2BR
535100118	RBR HS SM BLUE 1/4"x150' 3000PSI SOLxSOL 2BR
535100120	RBR HS SM BLUE 1/4"x200' 3000PSI SOLxSOL 2BR

+ COMPARED TO GOODYEAR NEPTUNE



BLUE

SEWER & JETTER HOSE

SEWER & JETTER HOSE

JETTER LATERAL LINE

Ideal for consumer and commercial sewer jetters with operating pressures of 4800 PSI or less and flow rates of 1.5 -5.0 GPM. These hoses offer optimum flexibility and lightweight construction.

- › Connectors: SOLxSOL or SOLxSWV
- › Reinforcement: Textile Braid
- › Cover: Smooth Thermoplastic
- › Inner Diameter: 1/8" 1/4" 3/8" 3/16"
- › Working (Max): 4000-4800 PSI
- › Burst (Min) 2.5:1 Working Pressure
- › Impulse Life: 200,000+
- › Temperature (Max): 160°F
- › Volume Discounts: Quantities of 30, 40, 50, 100, 200 and 300

LATERAL LINE & DRAIN CLEAN | 1/8" 4800PSI (160°) (Textile Braid)


Item Code	Description
686200047	SWR HS BLACK 1/8"x25' 4800PSI SOLxSOL w/1/4" BUSHING
686200006	SWR PLS BLACK 3/16"x50' 4800PSI -02SOLx-04SOL
686200007	SWR HS BLACK 1/8"x50' 4800PSI SOLxSOL w/1/4" BUSHING
686200051	SWR HS BLACK 1/8"x100' 4800PSI SOLxSOL w/1/4" BUSHING

LATERAL LINE & DRAIN CLEAN | 1/4" 4400PSI (160°) (Textile Braid)

Item Code	Description
686200032	SWR HS BLACK 1/4"x50' 4400PSI SOLxSWV
686200012	SWR HS BLACK 1/4"x100' 4400PSI SOLxSWV
686200010	SWR HS BLACK 1/4"x150' 4400PSI SOLxSWV
686200020	SWR HS BLACK 1/4"x200' 4400PSI SOLxSWV
686200050	SWR PLS BLACK 1/4"x300' 4400PSI SOLxSWV REELED
686200053	SWR PLS BLACK 1/8"x200' 4800PSI SOLxSOL-04 BUSHING

LATERAL LINE & DRAIN CLEAN | 3/8" 4000PSI (160°) (Textile Braid)

Item Code	Description
686200021	SWR HS BLACK 3/8"x100' 4000PSI SOLxSWV
686200034	SWR HS BLACK 3/8"x150' 4000PSI SOLxSWV
686200025	SWR HS BLACK 3/8"x200' 4000PSI SOLxSOL
686200011	SWR HS BLACK 3/8"x200' 4000PSI SOLxSWV
686200035	SWR HS BLACK 3/8"x300' 4000PSI SOLxSWV



BLACK

SEWER & JETTER HOSE JETTER MAIN LINE

Commercial and municipal cleaning hoses with an operating pressure of 4000 PSI designed for truck or trailer mount sewer jetter applications.

- › Connectors: SOLxSWV
- › Reinforcement: Textile Braid
- › Cover: Smooth Thermoplastic
- › Inner Diameter: 1/2"
- › Working (Max): 4000 PSI
- › Burst (Min) 3:1 Working Pressure
- › Impulse Life: 200,000+
- › Temperature (Max): 160°F
- › Volume Discounts: in Quantities of 30, 40, 50, 100, 200 and 300

MAIN LINE CLEANER | 1/2" 4000PSI (160°) (Textile Braid)

Item Code	Description
686200100	SWR HS GREEN 1/2"x50' 4000PSI SOLxSWV
686200094	SWR HS GREEN 1/2"x100' 4000PSI SOLxSWV
686200062	SWR HS GREEN 1/2"x200' 4000PSI SOLxSWV
686200058	SWR HS GREEN 1/2"x300' 4000PSI SOLxSWV
686200120	SWR HS GREEN 1/2"x400' 4000PSI SOLxSWV
686200090	SWR HS GREEN 1/2"x500' 4000PSI SOLxSWV



GREEN




BULK HOSE REELS

BULK HOSE REELS BULK REELS*

ProPulse's industry standard bulk pressure washer hoses are designed for up to 5 GPM heavy duty cleaning applications and available in hose reel lengths of 250' and 500'. The hose construction has one layer of high tensile braided steel reinforcement and rubber construction throughout—making them the hose of choice for manufacturers of commercial duty pressure washers. Reels are an ideal option for customizing hose assemblies for your unique needs and suitable for cold and hot water commercial pressure cleaning applications.

- › Reinforcement: One or Two-Layer Wire Braid
- › Burst (Min) 3:1 Working Pressure
- › Cover: Smooth or Wrapped Rubber
- › Impulse Life: 200,000+
- › Inner Diameter: 1/4" or 3/8"
- › Temperature (Max): 250°F
- › Working (Max): 3000-6000 PSI

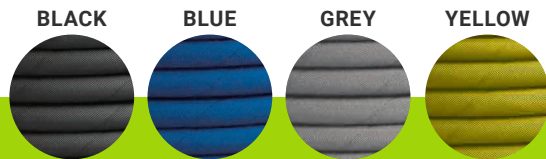

* STANDARD 24-HOUR SHIPPING COMMITMENT IS NOT GUARANTEED FOR BULK HOSE REELS; PLEASE CONTACT YOUR SERVICE TEAM FOR PRODUCT AVAILABILITY.



Bulk Smooth Rubber | 1/4" 3000PSI (250°) (1-Wire Braid)

Item Code	Description
SHPW-04-250RL	250' BULK RBR HS SM BLACK 1WIRE DN6 3000PSI
SHPW-04-500RL	500' BULK RBR HS SM BLACK 1WIRE DN6 3000PSI
SHPW-04BL-250RL	250' BULK RBR HS SM BLUE 1WIRE DN6 3000PSI
SHPW-04BL-500RL	500' BULK RBR HS SM BLUE 1WIRE DN6 3000PSI

Bulk Smooth Rubber | 3/8" 4000PSI (250°) (1-Wire Braid)

Item Code	Description
SHPW-06-250RL	250' BULK RBR HS SM BLACK 1WIRE DN10 4000PSI
SHPW-06-500RL	500' BULK RBR HS SM BLACK 1WIRE DN10 4000PSI
SHPW-06BL-250RL	250' BULK RBR HS SM BLUE 1WIRE DN10 4000PSI
SHPW-06BL-500RL	500' BULK RBR HS SM BLUE 1WIRE DN10 4000PSI

Bulk Wrapped Rubber | 3/8" 4000PSI (250°) (1-Wire Braid)

Item Code	Description
HPW1-06-250RL	250' BULK RBR HS BLACK 1WIRE DN10 4000PSI
HPW1-06-500RL	500' BULK RBR HS BLACK 1WIRE DN10 4000PSI
HPW1-06GR-250RL	250' BULK RBR HS GREY 1WIRE DN10 4000PSI
HPW1-06GR-500RL	500' BULK RBR HS GREY 1WIRE DN10 4000PSI
HPW1-06BL-250RL	250' BULK RBR HS BLUE 1WIRE DN10 4000PSI
HPW1-06BL-500RL	500' BULK RBR HS BLUE 1WIRE DN10 4000PSI
HPW1-06YL-250RL	250' BULK RBR HS YELLOW 1WIRE DN10 4000PSI
HPW1-06YL-500RL	500' BULK RBR HS YELLOW 1WIRE DN10 4000PSI

Bulk Wrapped Rubber | 3/8" 6000PSI (250°) (1-Wire Braid)

Item Code	Description
HPW2-06-250RL	250' BULK RBR HS BLACK 2WIRE DN10 6000PSI
HPW2-06-500RL	500' BULK RBR HS BLACK 2WIRE DN10 6000PSI
HPW2-06GR-250RL	250' BULK RBR HS GREY 2WIRE DN10 6000PSI
HPW2-06GR-500RL	500' BULK RBR HS GREY 2WIRE DN10 6000PSI



QUICK CONNECT SOCKET & PLUGS*



1/4" QUICK CONNECTS

Item Code	Description
14-0396	QC 1/4" FNPT BRASS SOCKET
14-0414	QC 1/4" FNPT S.S. SOCKET
14-0411	QC 1/4" FNPT BRASS PLUG
14-0399	QC 1/4" FNPT ZINC STEEL PLUG
14-0403	QC 1/4" FNPT S.S. PLUG
14-0397	QC 1/4" MNPT BRASS SOCKET
10-0406	QC 1/4" MNPT BRASS PLUG
10-0400	QC 1/4" MNPT ZINC STEEL PLUG
10-0402	QC 1/4" MNPT S.S. PLUG

3/8" QUICK CONNECTS

Item Code	Description
14-0389	QC 3/8" FNPT BRASS SOCKET
14-0376	QC 3/8" FNPT S.S. SOCKET
14-0412	QC 3/8" FNPT BRASS PLUG
14-0390	QC 3/8" FNPT ZINC STEEL PLUG
14-0377	QC 3/8" FNPT S.S. PLUG
14-0398	QC 3/8" MNPT BRASS SOCKET
10-0407	QC 3/8" MNPT BRASS PLUG
10-0401	QC 3/8" MNPT ZINC STEEL PLUG
10-0391	QC 3/8" MNPT S.S. PLUG

1/2" QUICK CONNECTS

Item Code	Description
14-0409	QC 1/2" FNPT BRASS SOCKET
14-0413	QC 1/2" FNPT BRASS PLUG
14-0410	QC 1/2" FNPT BRASS PLUG
14-0408	QC 1/2" MNPT BRASS PLUG
14-0404	QC 1/2" MNPT BRASS SOCKET
14-0405	QC 1/2" MNPT STEEL PLUG

ALLOWS FOR EFFICIENT CHANGEOVER & INSTALLATION

› **FST Straight Thru Style:** No Check Valve in Socket or Plug

› **Materials:** Brass, Zinc Plated Steel and Stainless Steel

› **Size:** 1/4", 3/8" and 1/2" in Both Male and Female Configurations

› **Buna-N O-Ring:** Excellent Ozone, Chemical and Aging Resistance

› **Viton® O-Ring:** Standard on Items 14-0389 and 14-0376

› **Viton® Replacement O-Rings:** Available Upon Request and Sold Separately

› **Temperature (Min/Max):** Operating Range -40°F/250°F

› **Optional Viton® O-ring**
Temperature (Min/Max): Operating Range -15°F / 400°F

› **Volume Discounts:** Quantities of 100, 200, 300, 400, 500 and 600

***STANDARD 24-HOUR SHIPPING COMMITMENT NOT GUARANTEED FOR QUICK CONNECTS; PLEASE CONTACT YOUR SERVICE TEAM FOR AVAILABILITY.**



ProPulse Now! ORDERING INFORMATION

Discounts are available based on annual purchase commitments to ProPulse or volume purchase quantities. Please contact the ProPulse service teams for the annual purchase requirements and details on the discount program.


IN-STOCK ProPulse Now! Orders:

- + All orders ship within 24 hours
- + Orders ship F.O.B. Peosta, Iowa
- + \$100 minimum purchase order requirement
- + \$20 convenience fee applies to all orders under \$100
- + Drop ship orders add an additional \$10 per shipping address
- + Open credit terms available: VISA®, MASTERCARD® and DISCOVER® accepted
- + 3% convenience fee applies to all credit card transactions
- + ProPulse has the right to substitute a product of equal or greater performance at any time
- + Pricing and specifications are subject to change at any time

NON-STOCK ProPulse Now! Orders:

- + Minimum order quantity of 10 assemblies equaling a minimum of \$250 per item
- + Requires completion of "STAMPED Worksheet"
- + Upon completion of request form, quote and lead time will be provided within 48 hours

ORDER THESE INNOVATIVE PRODUCTS TODAY.



CREDIT RETURNS: We accept credit returns of in-stock ProPulse items up to 90 days after purchase with a 15% restocking fee. Please contact your service team for "Return Materials Authorization" (RMA). Return shipping costs must be prepaid by you and include a copy of the RMA. When returning item(s), credit (less the original shipping and restocking fees) will be issued upon return and evaluation of original condition. Due to the custom nature of non-stock items, credit returns are not accepted. For warranty returns, please refer to our limited warranty policy.

ProPulse STAMPED WORKSHEET

At ProPulse, we know that some projects require a custom hose solution. To help us quote and build the perfect hose assembly for your application, please complete this worksheet. Experienced sales team members are just a phone call away, and knowledgeable field representatives are available when a site visit may be necessary.

S—SIZE What is the size of the hose?

- > What is the size of the hose? Outside Diameter (OD)

- > Inner Diameter (ID) Coupled Length (OAL)

T – TEMPERATURE What is the temp

- > Temperature of product being transferred: Min: Max:

- > Temperature of the environment: Min: Max:

A – APPLICATION How is the hose being used?

- > How is the hose being used: Suction Discharge Pressure

M – MATERIAL What material is going through the hose?

- > (Please include product that is normally transferred as well as any cleaning fluids)

P – PRESSURE What is the maximum pressure (PSI)?

- > Maximum pressure (PSI) or suction (in/HG)? SAE or DIN rating? Bend Radius?

E – ENDS What fittings do you want? Open ended?

- > (Type: elbow / long drop / male / female / swivel / plating)

D – DELIVERY

- > When do you want the hose?

- > Estimated annual usage (EAU) and typical purchase quantities:

- > Testing required? Yes No

- > Certification required? Yes No

OTHER NOTES

- > Any issues with your current hose? Or objectives you are trying to address (i.e. flexibility, abrasion, environment, routing)?



LIMITED WARRANTY

Subject to the limitations stated herein, Schieffer Co. International, L.C., dba ProPulse (Seller) warrants that the products manufactured by Seller identified below shall be free from material defects in materials and workmanship and shall perform the services for which they are intended when properly installed, under normal use, and under ordinary conditions, for:

HYDRAULIC HOSE: A period of 365 days from the date of shipment of the product to BUYER.

HIGH PRESSURE CLEANING HOSE: A period of 180 days from the shipment of the product to the BUYER.

Buyer must notify Seller in writing of a potentially defective product as soon as possible, which notice must provide the appropriate marked date codes, part numbers of the product and a description of the potential defect. Upon receipt of such notice, Seller shall, at its option and at its expense, examine such product at Seller's factory or such other location as Seller shall determine. Should Seller agree to a return of the product, Buyer shall follow in every respect the packaging and transportation instructions provided by Seller. In no case shall a product be returned without first obtaining the permission of Seller. If a product is proven to the satisfaction of Seller to be defective, then Seller shall, at its option and at its expense, repair or replace such product or reimburse Buyer for the price paid by Buyer for such product, and credit will be issued to Buyer to

offset the expense of the return shipment to Seller for shipments within the continental United States. The cost of shipping to Buyer a repaired or replaced product shall be paid by Seller on the same shipping terms as the original shipment of such product to Buyer. Except as stated herein, Buyer shall assume all responsibility and expense for any dismantling, removal, reinstallation, and shipping in connection with this Limited Warranty, and no claims will be allowed for labor, shipping, materials, incidental, consequential, or other costs incident to the repair, replacement, or return of a product.

THIS LIMITED WARRANTY IS THE ONLY WARRANTY PROVIDED BY SELLER AND IS MADE IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE AND THOSE ARISING BY OPERATION OF LAW, TRADE USAGE, OR COURSE OF DEALING.

NOTWITHSTANDING THE FOREGOING, THERE ARE NO WARRANTIES WHATSOEVER ON PRODUCTS BUILT OR ACQUIRED WHOLLY OR PARTIALLY TO BUYER'S DESIGNS OR SPECIFICATIONS.

SELLER'S LIABILITY IS LIMITED TO REPAIR, REPLACEMENT, OR REIMBURSEMENT AS PROVIDED ABOVE, AND IN NO EVENT SHALL SELLER'S LIABILITY EXCEED THE PURCHASE PRICE OF THE PRODUCT(S)

INVOLVED. THIS LIMITED WARRANTY PROVIDES THE EXCLUSIVE REMEDY AGAINST SELLER FOR CLAIMS RELATING TO PRODUCTS, WHETHER IN CONTRACT, IN TORT (INCLUDING NEGLIGENCE), OR UNDER ANY OTHER LEGAL THEORY, AND WHETHER ARISING OUT OF WARRANTIES, REPRESENTATIONS, INSTRUCTIONS, OR DEFECTS FROM ANY CAUSE. IN NO EVENT SHALL SELLER BE LIABLE FOR OR OBLIGATED TO PAY ANY CONSEQUENTIAL, INCIDENTAL, SPECIAL, INDIRECT, OR PUNITIVE DAMAGES OF ANY KIND, INCLUDING, BUT NOT LIMITED TO LOST PROFITS. THIS LIMITED WARRANTY EXTENDS ONLY TO BUYERS WHO PURCHASE SELLER'S PRODUCT(S) DIRECTLY FROM SELLER ("ORIGINAL PURCHASERS"), INCLUDING MANUFACTURERS, RETAILERS, DEALERS, DISTRIBUTORS AND WHOLESALERS. THIS LIMITED WARRANTY IS NOT ASSIGNABLE OR OTHERWISE TRANSFERABLE BY THE ORIGINAL PURCHASER TO ANY OTHER PARTY. SELLER EXTENDS NO WARRANTY, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, TO "CONSUMERS," AS THAT TERM IS DEFINED IN THE MAGNUSON-MOSS WARRANTY ACT (15 U.S.C. SECTIONS 2301 ET SEQ.) AND THE REGULATIONS PROMULGATED THEREUNDER. IN NO EVENT SHALL THE DURATION OF ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE BE LONGER THAN THE PERIOD PRESCRIBED HEREIN.

This Limited Warranty shall not apply to product failure or defect: caused by external or internal abrasion, kinking, twisting, cutting, pulling, impact, use for the transfer or spray of flammable materials (including solvents, petroleum, and gases of any kind), use with fluids which exceed the product's labeled pressure or temperature limits, storm, fire, wind, accident, or similar casualty; where the product has been modified without the prior written authority of Seller; caused by installation or use of the product contrary to any instructions or specifications provided by Seller; caused by the improper installation, use, application, maintenance, repair, transportation, handling, or storage of the product; caused by the fault or negligence of anyone other than Seller or any other act or event beyond the control of Seller. Seller makes no warranties as to any products or product parts or components that are not manufactured by Seller, and such items may be warranted only to the extent of the original manufacturer's warranty, if any. The limitations of liability contained in this Limited Warranty shall be effective without regard to Seller's performance or failure or delay of performance under any other term or condition of any trade customs, warranty, or other agreement. No employee, representative, or agent of Seller, nor any other person, has authority to assume or incur on behalf of Seller any liability, obligation, or responsibility in place of or in addition to this Limited Warranty.

POWER MOVING FORWARD™



Get in contact with us today!
info@powermovingforward.com
www.powermovingforward.com

ProPulse—a Schieffer Co.
8545 Kapp Dr. | P.O. Box 13
Peosta, IA 52068-0013

Phone | (563) 583-4758
Toll-Free | (877) 384-4673
Fax | (800) 303-4673